


# Fact sheet **ECO-Skate** RF64

ROTO Load moving system, 360 ° rotatable, 3-/4- load points

# HTS

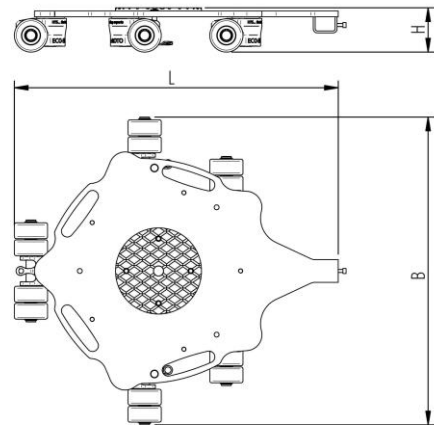

## Specification:


Heavy-duty load moving system (360°) for the professional indoor heavy load transport on clean, smooth and level floors, incl. individually rotatable high-quality HTS Nylon wheels (abrasion-resistant, non-marking), anti slip rubber pad and attachment for alignment bars or pulling bars in various versions. Multifunctional and flexible due to the ability of block the wheels boxes with pins. It can be used like a fixed rear skates, equipped with an additional turntable like a steerable skate. In combination with an L-, S- or DUO load moving system with the same installation height, it forms a safe overall system with 3 load points (with secured load also as a 4-point system if the operating instructions are observed).

## Technical data of load moving system:

#	10 064 04 41	Ø	Ø 8.7 in		$0.4 \times 1.6 = 0.7 \text{ in}^2$ ▼ 1214 psi
MAT	PU, ST, 93 Shore A	L x B x H	32.6 x 30.9 x 4.3 in		13.6 in <sup>2</sup>
	14109 lb	D = 46.1 in V = 36.3 - 76.4 in			843 lbf*
#	20	141 lb			506 lbf*

## Equipped with the following wheel:

#	11 085 01 34		$0.4 \times 1.6 = 0.7 \text{ in}^2$ ▼ 1214 psi
MAT	PU, ST, 93 Shore A		827 lb
	Ø3.3x1.7 - Ø1.0 in	1.25 MPH	$V_{\text{max}} = 1.25 \text{ mph}$



**Please always observe the operating instructions, their safety instructions and local conditions!**

#	Part No.	#	Number of wheels	Ø	Load Area in inch		Area inch <sup>2</sup> of the roller surface pressure ▼ psi		Traction* in lbf, required force to move the load at a steady speed of 1.25 mph under ideal conditions
MAT	Wheel material layer, core: AL Aluminium, NY Nylon PU Polyurethane, ST Steel		Dimensions of wheel, inside ball bearing diameter inch		Dimensions in inch L x B x H		Loaded area per skate in inch <sup>2</sup>		
	Carrying Capacity of load moving skate in lb at 1.25 mph max.		Weight lb		Steering bar length D for L, adjustability V for S and DUO skate systems		Starting resistance* in lbf, required force to start moving, under ideal conditions		* Varies depending on the tolerances of the floor and ambient situation. All information without guarantee.